




# Safeguard™ Gate Safety Barrier

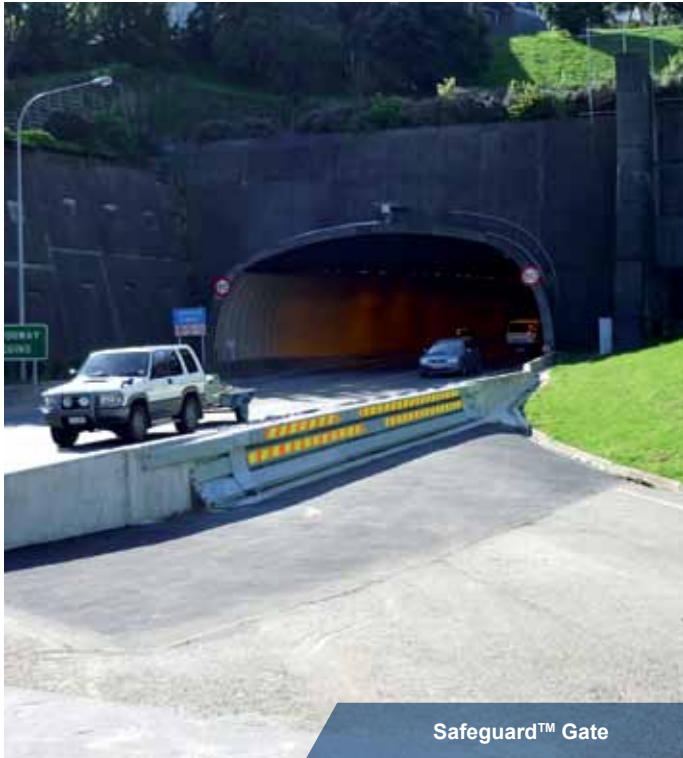

Safeguard™ Gate

## Features

- » Approved to NCHRP 350 TL-3
- » Contraflow traffic during maintenance or emergencies
- » Manually operated for guaranteed opening
- » Low cost median gate
- » Fast installation
- » Assembled at installation point or offsite
- » Suitable as permanent or temporary work zone barrier
- » Can be placed in most median barrier systems
- » Hinges from either end
- » Can be unpinned for complete removal
- » Less than 5 minutes for one person to open the system when required
- » Positive security with easy to monitor locks



## Specifications: NCHRP 350 TL-3

- » **Height:** 830mm
- » **Width:** 700mm
- » Gate openings from 8m to 16m
- » Structural steel, Hot dip galvanised
- » Crank actuated, retractable castor wheels lift gate off foundations
- » Attaches directly to safety shape and single slope concrete barriers
- » Foundation options to both permanent and temporary concrete barriers
- » Transitions available to most median barrier systems

More information on **Safeguard™ Gate safety Barrier** can be found at [www.cspacific.co.nz](http://www.cspacific.co.nz) or call **0800 655 200**

Leading road side and barrier systems supplier

### CSP PACIFIC

306 Neilson St, Onehunga,  
PO Box 12 949, Penrose,  
Auckland 1642, New Zealand  
[www.cspacific.co.nz](http://www.cspacific.co.nz)



Columns



Multiplate



Retaining



Hire



Barriers



Traffic Control