

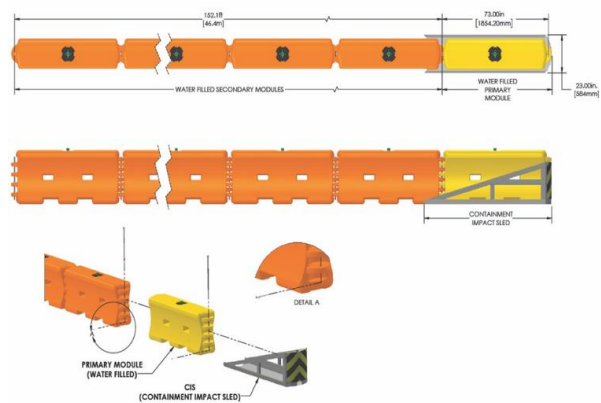


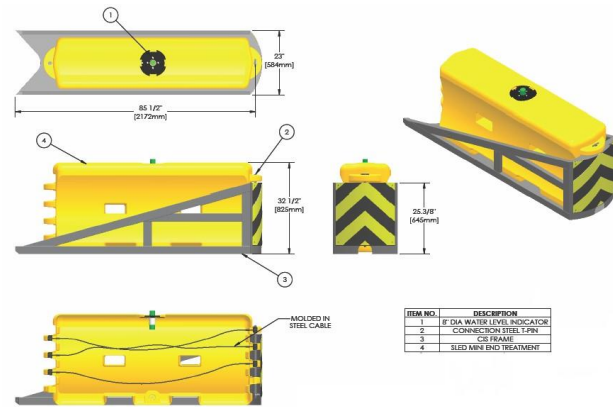

TraFFix Water Cable Barrier – TL-2 MASH

TraFFix Water Cable Barrier MASH TL-2, is a plastic, water filled, portable barrier that provides positive protection to the work zone. Available for hire, this barrier is designed to redirect a vehicle and bring it to a controlled stop meeting the TL-1 and TL-2 requirements as a longitudinal barrier under the manual for Assessing Safety (MASH).

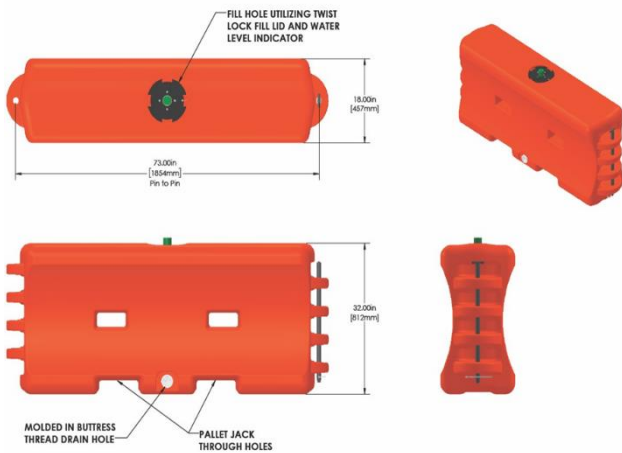

TraFFix Water Cable Barrier MASH TL-2 uses water dispersion in combination with moulded-in steel cables. Upon impact, the plastic module ruptures and disperses the contained water to prevent vehicle intrusion into the work zone. Simultaneously, the steel cables provide the strength to safely catch the misguided vehicle, preventing vehicle intrusion into the work zone.

Features

- » Available for hire
- » System is MASH compliant
- » Steel cables provide added strength & safety
- » Meets TL-1 & TL-2 requirements under MASH
- » Each unit requires 466L of water
- » Weight 45.6kg – empty
- » Fill tabs – visual display
- » A median or roadside barrier
- » If end treatment required the SLED Mini End Treatment should be used.

More information on **TraFFix Water Filled Barrier** can be found at www.cspacific.co.nz or call **0800 655 200**

Leading road side and barrier systems supplier

CSP PACIFIC

306 Neilson St, Onehunga,
PO Box 12 949, Penrose,
Auckland 1642, New Zealand
www.cspacific.co.nz



Columns



Multiplate



Hire



Barriers



Traffic Control